


CASTLE ROCK

SHADY
OAK

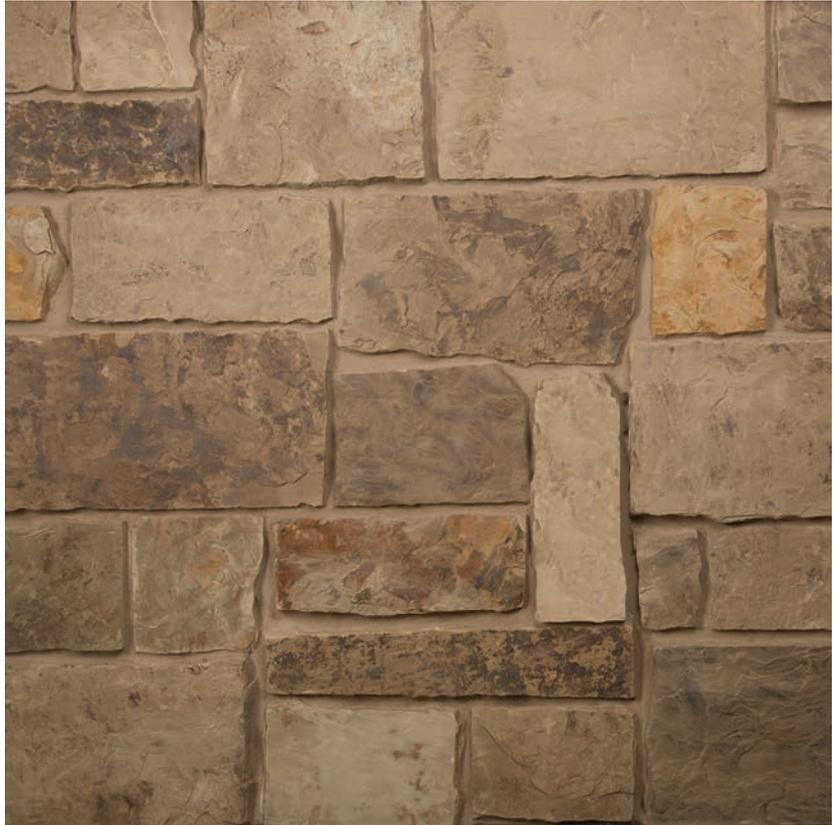

GEOLOGY: sandstone

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

tan, cream, gold, orange
and occasional black

COLOR CONSISTENCY PER PALLET

somewhat consistent

WEIGHT CALCULATED IN INCHES

$l \times w \times h / 1728$ (inches cubed) $\times 160$
= approx 160 pounds per cubic foot

PALLET

FULL VENEER: 3,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx - 100 sq ft flats and 50 lineal ft corners
Sm Bx - (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

FULL VENEER

COMMON COVERAGE ^{*Est.(can vary)}

Standard Joint	Drystack	Overgrout
45 square feet / ton	35 ft ² /ton	55 ft ² /ton

SHADY OAK

DIMENSIONS

US: inches (average) METRIC: mm (average)

l: 6" to 42" (16") l: 152 to 1066 (406)

h: 4" to 12" h: 101 to 304

w: 3" to 5" (4") w: 76 to 127 (101)

stone shall not vary in height more than 1/2
an inch in a 12 inch span

EXAMPLE

a stone that is 24 inches long could have a
height of 6 inches on one end and 5 inches
on the other end and be acceptable

TYPICAL PIECE

ends square;
split top, bottom, and sides;
bedface face and back;
stone is squares and rectangles

PART NUMBERS

FULL VENEER

part number: 1BSTBLU01001TN

THIN VENEER

qty bx flat: 1BTVBLU01001QB
sm bx flat: 1BTVBLU01001BX
qty bx corner: 1BTVBLU01501QB
sm bx corner: 1BTVBLU01501BX

THIN VENEER

COMMON COVERAGE PER BOX ^{*Est.(can vary)}

Standard Joint	Drystack	Overgrout
8 & 100 square feet	6 & 75 ft ²	10 & 110 ft ²

SHADY OAK

DIMENSIONS

US: inches (average) METRIC: mm (average)

l: 4" to 24" (14") l: 101 to 609 (355)

h: 4" to 12" h: 101 to 304

w: 3/4" to 1-1/4" (1") w: 19 to 31 (25)

corner return 3" to 5" cr: 76 to 127
stone shall not vary in height more than 1/2
an inch in a 12 inch span

EXAMPLE

a stone that is 24 inches long could have a
height of 6 inches on one end and 5 inches
on the other end and be acceptable

TYPICAL PIECE

ends square;
split top, bottom, and sides;
bedface face and sawn back;
stone is squares and rectangles

ASTM TESTING DATA

SHADY OAK C97 water absorption—2.83%

SHADY OAK C97 specific gravity—2.50



www.buechelstone.com