


LEDGESTONE

**CINNAMON
BARK
LEDGESTONE**

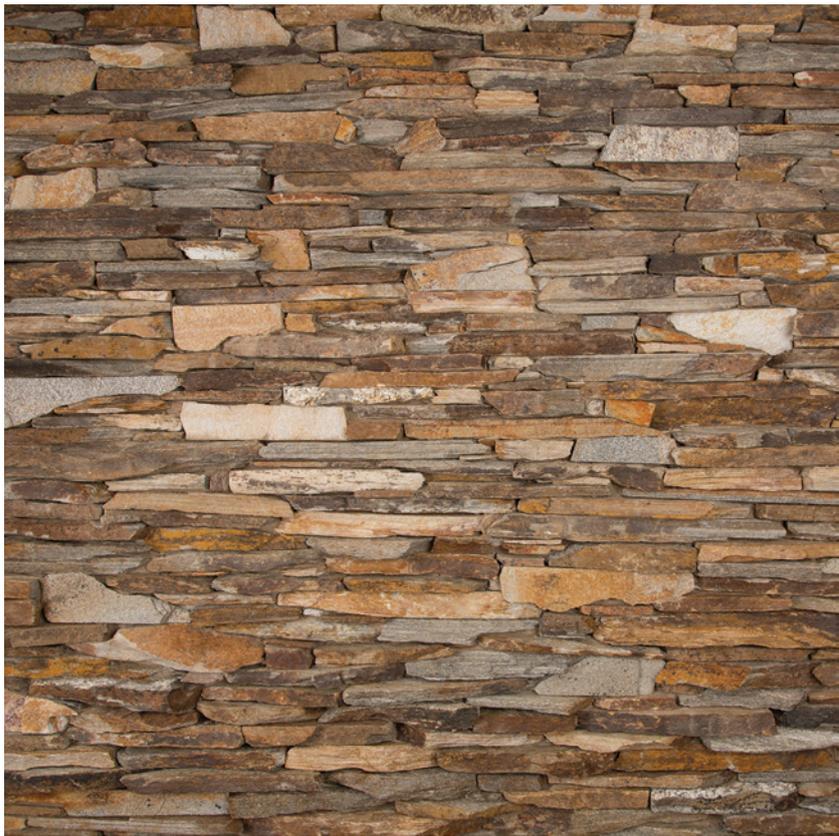

GEOLOGY: gneiss (form of granite)

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

silver, gold, and brown

COLOR CONSISTENCY PER PALLET

somewhat consistent

WEIGHT CALCULATED IN INCHES

l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET

FULL VENEER: 3,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx - 100 sq ft flats and 50 lineal ft corners
Sm Bx - (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

FULL VENEER

COMMON COVERAGE *Est.(can vary)

Figured for Drystack Joint Only
30 square feet / ton

CINNAMON BARK LEDGESTONE

DIMENSIONS

US: inches (average) METRIC: mm (average)

l: 4" to 16" (8") l: 100 to 400 (203)

h: 3/4" to 2-1/4" h: 19 to 57

w: 3" to 5" (4") w: 76 to 127 (101)

TYPICAL BLEND

up to 30 percent may be sawn top and
bottom with a bedface face;

face of stone cannot have a sawn finish

TYPICAL PIECE

ends random;

natural cleft top and bottom;

face and sides natural split or seamface;

back sawn; stone is linear

PART NUMBERS

FULL VENEER

part number: 1BSTBUE06001TN

THIN VENEER

qty bx flat: 1BTVBUE06001QB
sm bx flat: 1BTVBUE06001BX
qty bx corner: 1BTVBUE06501QB
sm bx corner: 1BTVBUE06501BX

FULL & THIN VENEER INSTALL NOTES

install 30% bedface out to achieve desired
square footage for a typical blend

THIN VENEER INSTALL NOTES

only use 25% corners with flats toothed in to
the remaining balance to accomplish color
range consistency on the corners

THIN VENEER

COMMON COVERAGE PER BOX *Est.(can vary)

Figured for Drystack Joint Only
8 & 100 square feet

CINNAMON BARK LEDGESTONE

DIMENSIONS

US: inches (average) METRIC: mm (average)

l: 4" to 16" (8") l: 100 to 400 (203)

h: 3/4" to 2-1/4" h: 19 to 57

w: 3/4" to 1-1/4" (1") w: 19 to 38 (25)

corner return 3" to 5" cr: 76 to 127

TYPICAL BLEND

up to 30 percent may be sawn top and
bottom with a bedface face;

face of stone cannot have a sawn finish

TYPICAL PIECE

ends random;

natural cleft top and bottom;

face and sides natural split or seamface;

back sawn; stone is linear

ASTM TESTING DATA

CINNAMON BARK C97

water absorption—0.29%

CINNAMON BARK C97 density—177.8 pcf

CINNAMON BARK C170

compressive strength—15,530 psi



www.buechelstone.com