

ACO GalaLine medium duty trench drain is designed to provide an effective solution for a wide variety of applications while using the minimum number of components - a real benefit for lean inventory management.


Choice of push-fit galvanized or ductile iron grates and accessories.

Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Basements
- Pools
- Light Commercial
- Private & Public Parking
- Schools



Product Overview

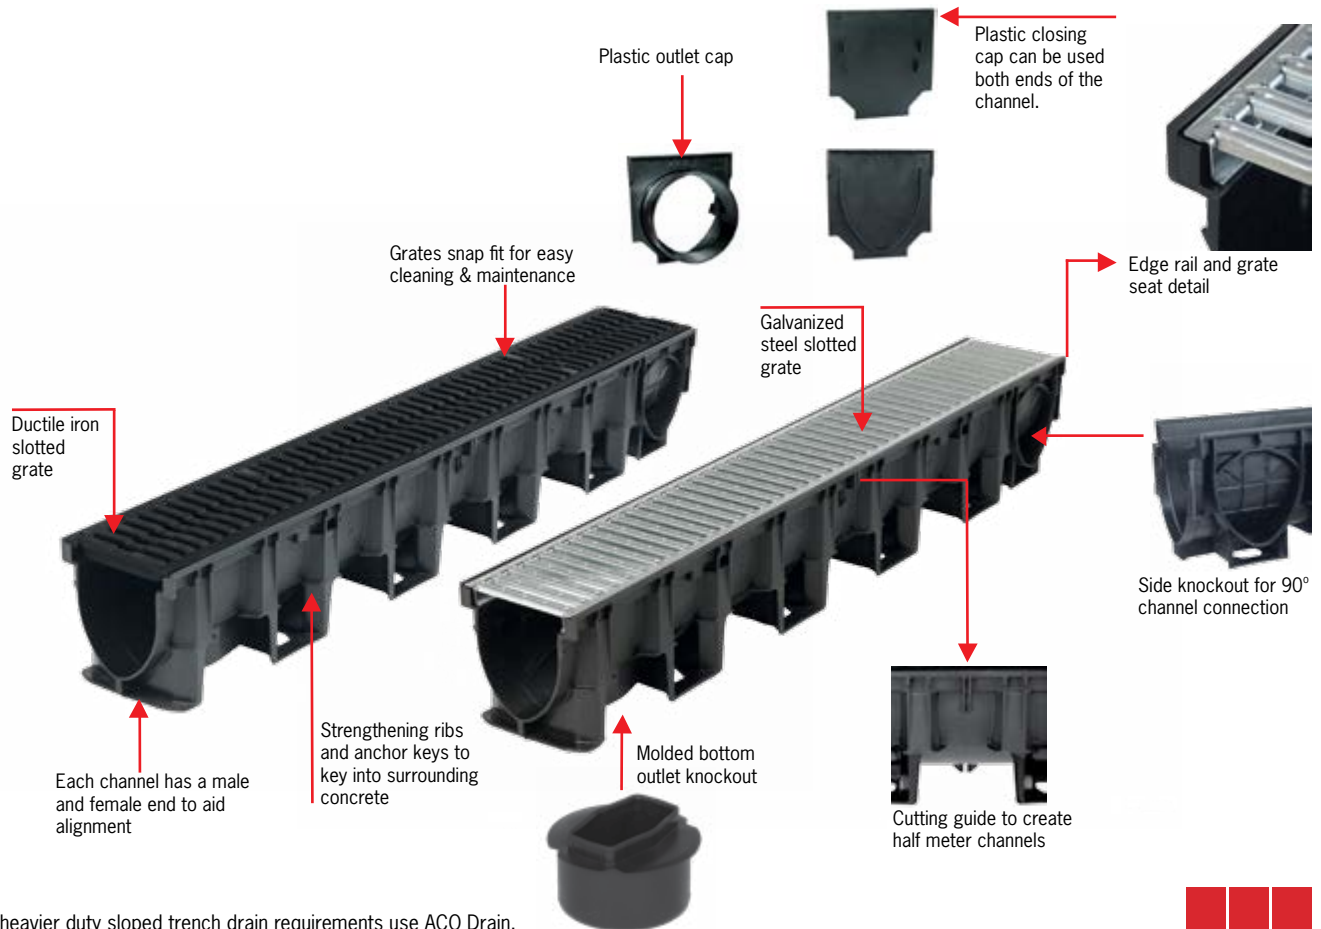

For heavier duty sloped trench drain requirements use ACO Drain.


Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
Channel with galvanized steel slotted grate	19189	39.4	5.4	6.0	7.6
Channel with ductile iron slotted grate	19193	39.4	5.4	6.0	21.1
Bottom outlet 4" pipe	11285	-	-	-	2.6
Bottom outlet 6" pipe	11286	-	-	-	3.0
Closing cap	11433	-	5.4	6.0	0.2
Outlet cap 4" pipe	11434	-	5.4	6.0	0.2

Grates




Galvanized steel - 0.47" (12mm) slot
Intake area per meter grate - 82.9 in²



Ductile iron - 0.31" (8mm) slot
Intake area per meter grate - 56.1 in²

Installation Instructions

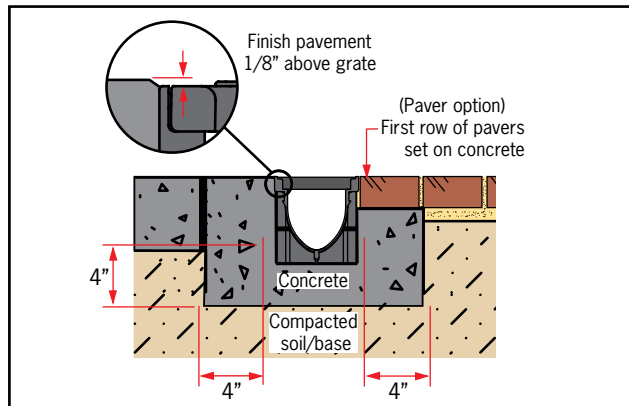

For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

Accessories

Plastic closing cap can be used both ends of the channel

Plastic 4" outlet cap

Plastic 4" bottom outlet

Plastic 6" bottom outlet



Excavate area to accommodate trench drain and 4" concrete surround, compact base.



Cut channels to fit required length (if necessary).



Knockout channel base for outlet at required position.



Push-fit outlet adaptor into bottom of channel, lay outlet channel first and connect to 3" or 4" SDR pipe or 4" schedule 40.



Lay 4" deep concrete bed. Lay channels working away from outlet, concrete surround should extend up channel sides into recesses to hold channel in place.



Finish pavement/pavers must be 1/8" higher than the grate.

For pedestrian **ONLY** applications, trench drain can be set directly on well compacted soil.

ACO Polymer Products, Inc.

East Sales Office

P.O. Box 245
Chardon, OH 44024
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (440) 285-7005

Southeast Sales Office

4211 Pleasant Road
Ft. Mill, SC 29708
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (803) 802-1063

West Sales Office

P.O. Box 12067
Casa Grande, AZ 85130
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Electronic Contact

info@acomarkant.com
www.acomarkant.com

Follow us on

