

ASHLAR

CHILTON CUSTOM COUNTRY BLEND



GEOLOGY: dolomitic limestone

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

65% Chilton Country Squire
25% Chilton Rustic
10% Full Color Castle Rock

COLOR CONSISTENCY PER PALLET


somewhat consistent

WEIGHT CALCULATED IN INCHES

l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET

FULL VENEER: 4,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx - 100 sq ft flats and 50 lineal ft corners
Sm Bx - (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

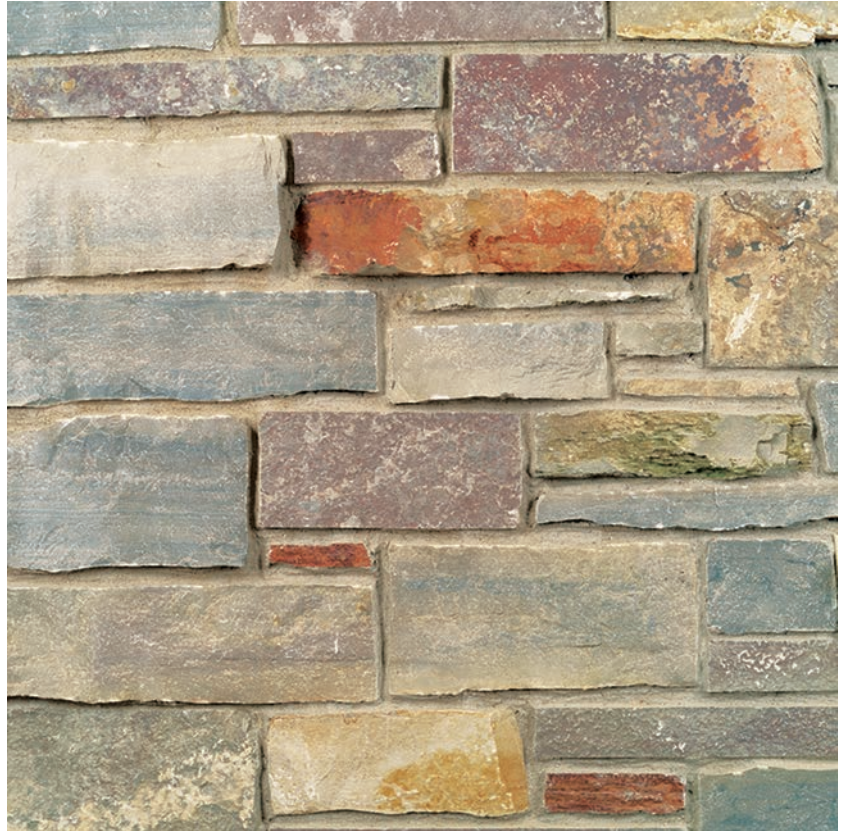

FULL VENEER

COMMON COVERAGE *Est.(can vary)

Standard Joint	Drystack	Overgrout
40 square feet / ton	30 ft ² /ton	50 ft ² /ton

CHILTON COUNTRY SQUIRE

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 42" (14")	l: 152 to 1066 (355)
h: 1/2" to 8"	h: 13 to 203
w: 3" to 5" (4")	w: 76 to 127 (101)

TYPICAL PIECE

ends square; natural cleft top and bottom;
back, face and sides split;
stone is mostly rectangular

CHILTON RUSTIC

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 42" (16")	l: 152 to 1066 (406)
h: 1/2" to 8"	h: 13 to 203
w: 3" to 5" (4")	w: 76 to 127 (101)

TYPICAL PIECE

ends square; natural cleft top and bottom;
weatheredge and seamface face; split back;
sides either split or naturally square;
stone is mostly rectangular

FULL COLOR CASTLE ROCK

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 42" (16")	l: 152 to 1066 (406)
h: 4" to 12"	h: 101 to 304
w: 3" to 5" (4")	w: 76 to 127 (101)

stone shall not vary in height more
than 1/2 an inch in a 12 inch span

TYPICAL PIECE

ends square; split top, bottom, and sides;
bedface face and back;
stone is squares and rectangles

PART NUMBERS

FULL VENEER

part number: 1BSTBUE01014TN

THIN VENEER

qty bx flat: 1BTVBUE01014QB
sm bx flat: 1BTVBUE01014BX
qty bx corner: 1BTVBUE01514QB
sm bx corner: 1BTVBUE01514BX

THIN VENEER

COMMON COVERAGE PER BOX *Est.(can vary)

Standard Joint	Drystack	Overgrout
8 & 100 square feet	6 & 75 ft ²	10 & 110 ft ²

CHILTON COUNTRY SQUIRE and CHILTON RUSTIC

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 24" (12")	l: 152 to 533 (304)
h: 1/2" to 8"	h: 12 to 203
w: 3/4" to 1-1/4" (1")	w: 19 to 31 (25)

corner return 3" to 5" cr: 76 to 127
stone shall not vary in height more
than 1/2 an inch in a 12 inch span

TYPICAL PIECE

CHILTON COUNTRY SQUIRE: ends square;
natural cleft top and bottom;
face and sides split; sawn back;
stone is mostly rectangular

CHILTON RUSTIC: ends square natural cleft
top and bottom; weatheredge and seamface
face; sawn back; sides either split or
naturally square; stone is mostly rectangular

FULL COLOR CASTLE ROCK

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 6" to 24" (12")	l: 152 to 533 (304)
h: 4" to 12"	h: 101 to 304
w: 3/4" to 1-1/4" (1")	w: 19 to 31 (25)

corner return 3" to 5" cr: 76 to 127
stone shall not vary in height more
than 1/2 an inch in a 12 inch span

TYPICAL PIECE

ends square; split top, bottom, and sides;
bedface face and sawn back;
stone is squares and rectangles

ASTM TESTING DATA

CHILTON C97 water absorption—0.08%
CHILTON C97 density—177.4 pcf
CHILTON C99 modulus of rupture—1,220 psi
CHILTON C170
compressive strength w/rift—50,560 psi
compressive strength across rift—38,090 psi
CHILTON C880 flexural strength—3,070 psi



www.buechelstone.com